




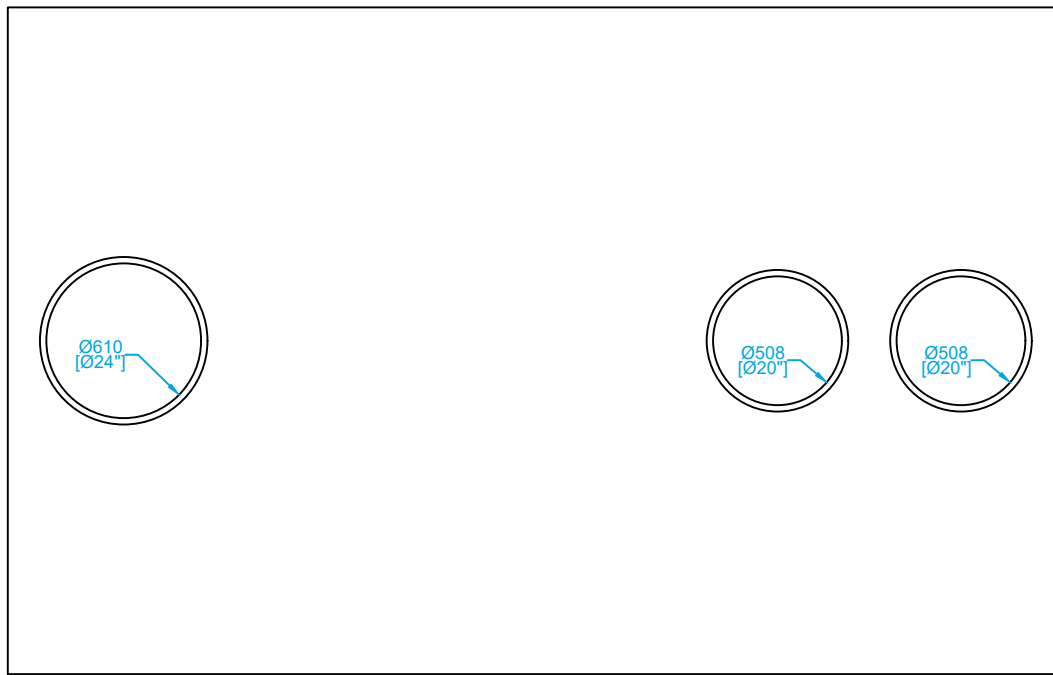


TOP VIEW - Z

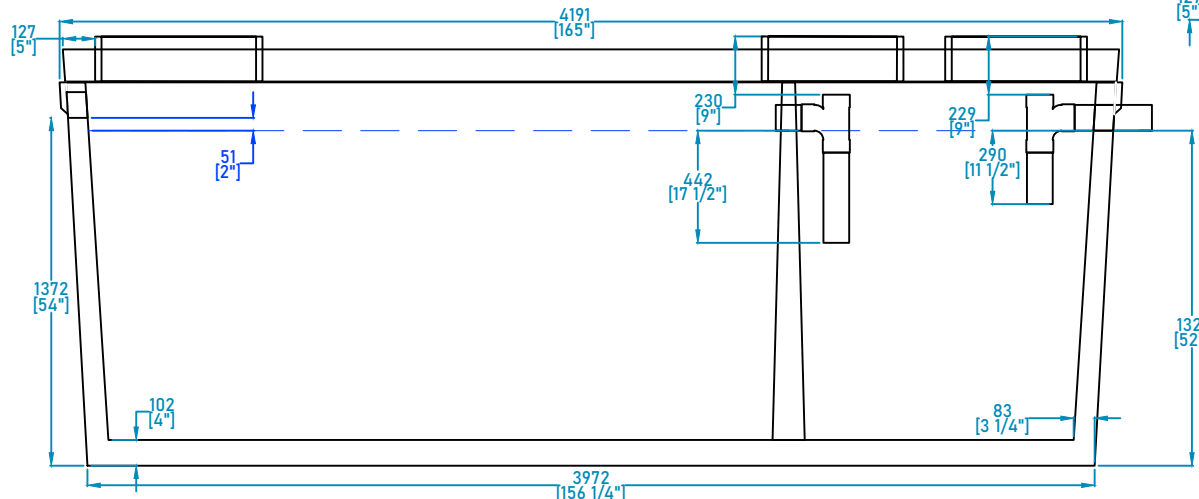

PLAN VIEW - X

JOINT DETAIL

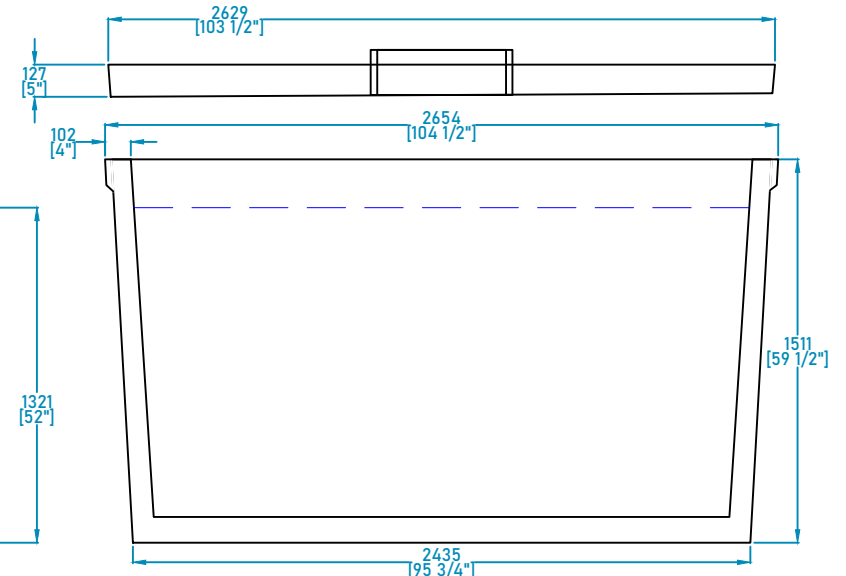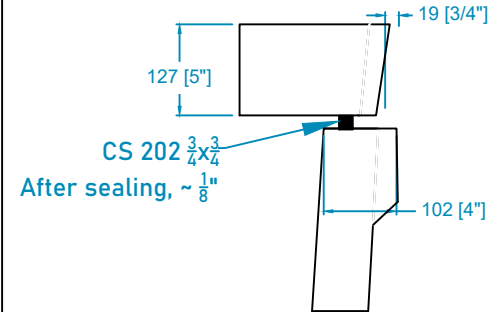

COMPONENT VIEW - Y

G2500-RP



Design Notes

Concrete in accordance with CSA 23-4
Effluent Filter included
Pipe fittings have 4" rubber gasket

Installation

Spreader bar and cables recommended
Not for use in sulfate soils
Max cover 1.2M

Statistics: 2500 Reverse Pump

Strength	32MPa @ 28 days	Lid Weight	2800 kg	6150 lb
Reinforcement	10M Rebar Sika 2" Fibres	Tank Weight	7050 kg	15500 lb
Sealant	Conseal CS-202	Total Weight	9850 kg	11365 lb
Gallons per Inch*	37.18(C1) 14.91(C2)	Capacity	11370 L	2500 Gal
		C1 Capacity	8110 L	1785 Gal
		C2 Capacity	3255 L	715 Gal

07/10/22

Drawn by: MCQ

*±3%