


**Notes:**

1. Concrete Strength 32 MPa @ 28 days
2. Concrete contains MacMatrix 2" Fibers
3. Lid Sealed with Conseal CS-665
4. 2 - 20" Polylok Lids
5. Tank Weight: 7400 LBS
6. Lid Weight: 2100 LBS

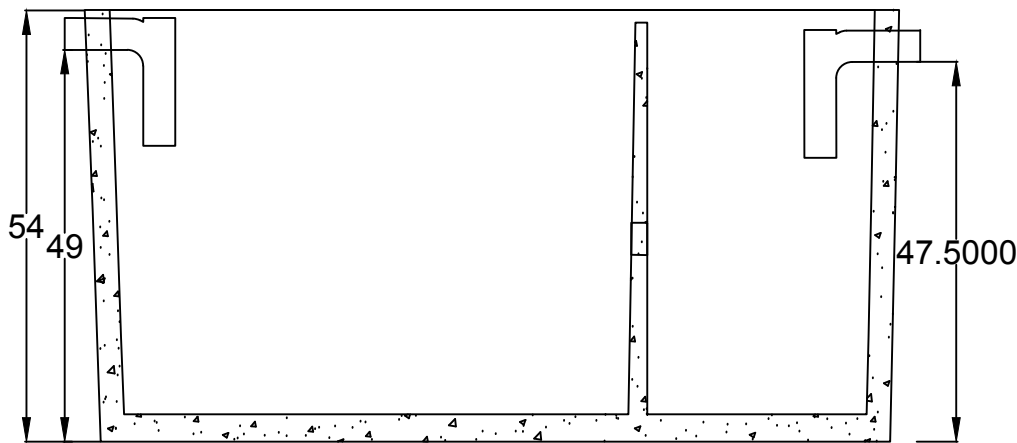

	<p>6100 Scott Rd. Duncan, B.C. 250-746-7400 <a href="http://www.dansprecast.com">www.dansprecast.com</a></p>
--	--

**1000 IMP. GAL. 2 COMP.  
(4546 LITRES)**

Gals/inch 1st Chamber: 15.75    2nd Chamber: 7.24

DATE: SEPTEMBER 11, 2018    DRAWN BY: EJG