


Notes:

1. Concrete Strength 32 MPa @ 28 days
2. Concrete contains MacMatrix 2" Fibers
3. Lid Sealed with Conseal CS-665
4. 2 - 24" Polylok Lids
5. Tank Weight: 15,600 LBS
6. Lid Weight: 7950 LBS

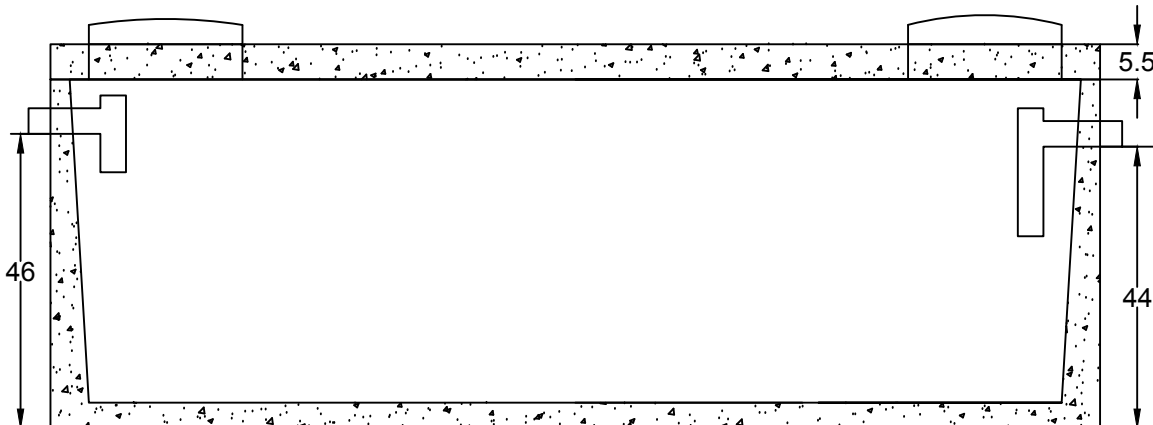

**DAN'S**  
*Pre-Cast*  
**LTD.**

6100 Scott Rd.  
Duncan, B.C.  
250-746-7400  
[www.dansprecast.com](http://www.dansprecast.com)

**2000 IMP. GAL. SINGLE COMP.  
(9092 LITRES)**

Gals/inch: 48.83

DATE: NOVEMBER 26, 2018

DRAWN BY:

EJG