


Notes:

1. Concrete Strength 32 MPa @ 28 Days
2. Concrete contains MacMatrix 2" Fibers
3. Lid Sealed with Conseal CS-665
4. 24" Polylok over outlet, 20" Polylok over Inlet
5. Polylok A1800 in divider wall
6. Tank Weight: 4700 LBS
7. Lid Weight: 1600 LBS

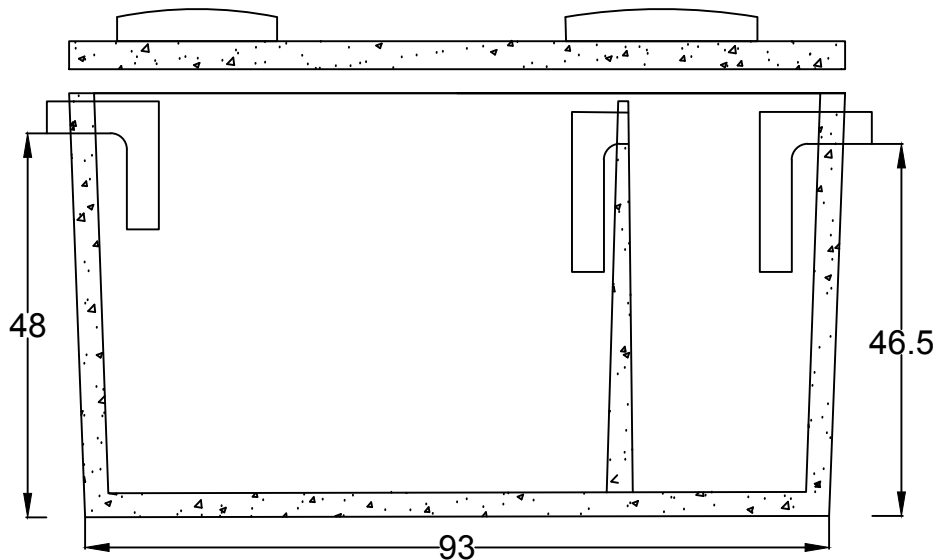

DAN'S
Pre-Cast
LTD.

6100 Scott Rd.
Duncan, B.C.
250-746-7400
www.dansprecast.com

**600 IMP. GAL. PUMP OUT
(2722 LITRES)**

Gals/inch Big Chamber: 12.33 Small Chamber: 4.57

DATE: SEPTEMBER 17, 2018

DRAWN BY:

EJG